

## RS-232C 2ch Serial I/O Board with Isolation COM-2P(PCI)H



\* Specifications, color and design of the products are subject to change without notice.

### Features

#### Max. 921,600bps RS-232C Serial Communication

The COM ports of this product support up to 921,600 bps.

COM-4P(PCI)H has four RS-232C-standard serial ports.

#### Isolation between channels and between PCs, surge protection for all signal lines

The channels are electrically isolated from each other and from the PC.

As isolation is provided between channels as well as isolation of the bus, this prevents electrical noise between channels as well as between the PC and external circuits. As surge protection is provided on all signal lines, you can safely use the boards in environments where you are concerned about surges causing incorrect operation or damage to the PC.

#### Possibly used as Windows, Linux-standard COM ports

Combining the product with our device driver COM-DRV makes it possible to use the product in the same manner as the COM ports of a PC.

This product supports communication using DCB structures in the Win32 API and Linux-standard system calls.

#### Up to 16 boards can be installed

Up to 16 boards of the same model can be mounted on a single PC.

#### Each channel is equipped with separate 128-byte FIFO buffers for transmit and receive

Equipped with a buffer memory for transmitting 128 bytes and receiving 128 bytes for each channel. These are FIFO format, useful for high speed communications and to reduce the load to the CPU when transmitting/receiving.

#### The product use the same easy-to-use 9-pin D-SUB connectors as are used on a PC

Using the most versatile general-purpose 9-pin D-SUB connector for RS-232C, the product allows you to use commercial cables which support the RS-232C standard.

#### The control line for RS-232C can be controlled and monitored by software

The control lines for RTS, CTS, DTR and DSR can be controlled and monitored using software.

This product is an isolated PCI bus-supported board designed for extending RS-232C compatible serial communication functionality on your PC.

COM-2P(PCI)H has two RS-232C communication ports.

Higher noise-resistant models with isolation between a PC and bus line as well as a surge protection circuit for communication ports.

With a 128byte built-in FIFO buffer for transmission and reception of each channel, the product supports a baud rate of up to 921,600bps.

Windows/Linux device driver is supported with this product.

- \* The contents in this document are subject to change without notice.
- \* Visit the CONTEC website to check the latest details in the document.
- \* The information in the data sheets is as of February, 2025.

### Specifications

#### Function specification

| Item                  | Specifications  |
|-----------------------|---|
| Number of channels    | 2 channels  |
| Interface type        | RS-232C   |
| Isolation             | Channel Isolation/Bus Isolation   |
| Isolation voltage     | Channel Isolation: 1000VDC, Bus Isolation: 1000VDC  |
| Transfer method       | Asynchronous serial transfer  |
| Baud rate             | 30 - 921,600bps *1*4  |
| Data length           | 5, 6, 7, 8 bits<br>1, 1.5, 2 stop bits  |
| Parity check          | Even, Odd, Non-parity   |
| Controller chip       | 162850 or equivalent<br>(Each channel has 128-byte receive and 128-byte transmit FIFO buffers.) |
| Connecting distance   | 15m(Typ.)   |
| Interrupt requests    | 1 level use *2  |
| I/O address           | Any 32-byte boundary  |
| Power consumption     | 5VDC 600mA (Max)  |
| PCI Bus specification | 32-bit, 33MHz, Universal key shapes supported *3  |
| Dimension (mm)        | 121.69(L) x 105.68(H) *3  |
| Weight                | 80g   |

- \*1 Data transmission at high speed may not be performed normally depending on the environment including the type of status of connected material of cable and environment.
- \*2 The interrupt signals from individual channels are arranged into a single interrupt signal and connected to the PCI bus.
- \*3 This board requires power supply at +5V from an expansion slot (it does not work on a machine with a +3.3V power supply alone).
- \*4 Product with different board numbers are different in these specifications. See "Differences by Board Number" at the end of this document.

#### Installation Environment Requirements

| Item                          | Specifications   |
|-------------------------------|--|
| Operating ambient temperature | 0 - 50°C   |
| Operating ambient humidity    | 10 - 90%RH (No condensation)   |
| Floating dust particles       | Not to be excessive  |
| Corrosive gases               | None   |
| Standard                      | VCCI Class A, CE Marking (EMC Directive Class A, RoHS Directive), UKCA |

## Support Software


| Name   | Contents  | How to get                          |
|--|---|-------------------------------------|
| Windows Version<br>Serial communication driver<br>COM-DRV(WDM) | Software that makes it possible to use the product in the same manner as the COM ports of a PC running Windows.<br>This software supports communication using DCB structures in the standard OS Win32 API, and the SerialPort class in the .NET Framework and the pySerial module in Python.<br>Various sample programs such as C# and Visual Basic .NET, Visual C++, Python etc. and diagnostic program useful for checking operation is provided. | Download from the CONTEC website *1 |
| Linux Version<br>Serial communication driver<br>COM-DRV(LNX)   | Software that makes it possible to use the product in the same manner as the COM ports of a PC running Linux.<br>This software conforms to Linux-standard tty drivers, and the pySerial module in Python. The software includes various sample programs such as gcc (C, C++) and Python programs.   | Download from the CONTEC website *1 |

\* Visit the CONTEC website for the latest optional products.  
<https://www.contec.com/download/>

## Included Items


Product [COM-2P(PCI)H] ...1  
Please read the following ...1

## External Dimensions



The standard outside dimension (L) is the distance from the end of the board to the outer surface of the slot cover.

## Component Name

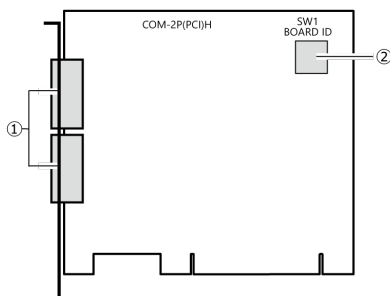




| No. | Name                           |
|-----|--------------------------------|
| 1   | Interface Connector (CN1, CN2) |
| 2   | Board ID Setting Switch (SW1)  |

## Connecting to an External Device

### Connecting directly to the port connector

If connecting an external device directly from the connector on the board, use a cable purchased separately.


### Pin Assignment

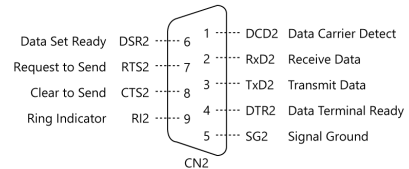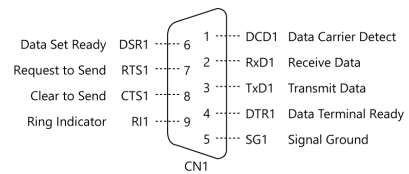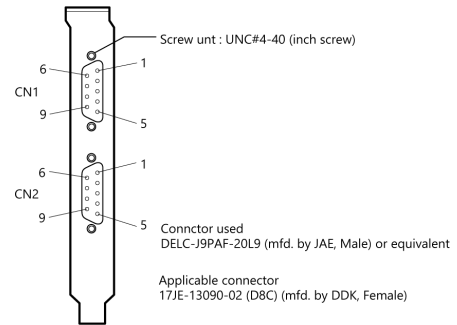


## Types of Cable and Example Connections

When using an RS-232C interface, different cables are required depending on the type of device to which you are connecting (computer or modem, etc.). Check the requirements of the external device and select either a straight-through or crossed (null modem) cable as appropriate. If special treatment of the signal lines in the connector is required, ensure that this is done in accordance with the specifications.


### Example Connection to a Modem (Straight cable)

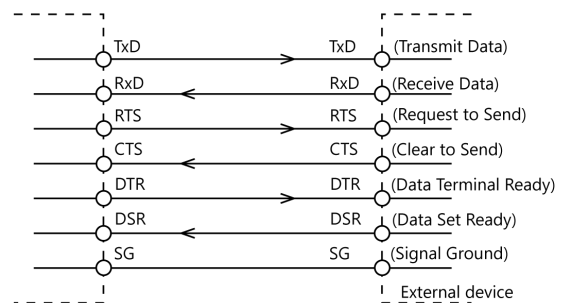

### Example Connection to a PC (Cross cable)

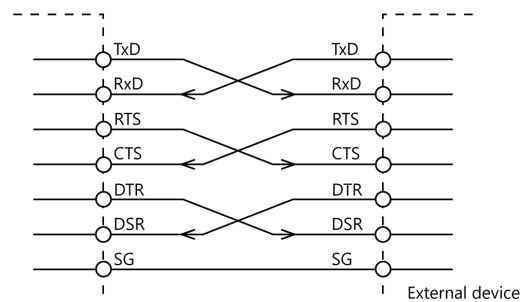

Example Connection to a Device

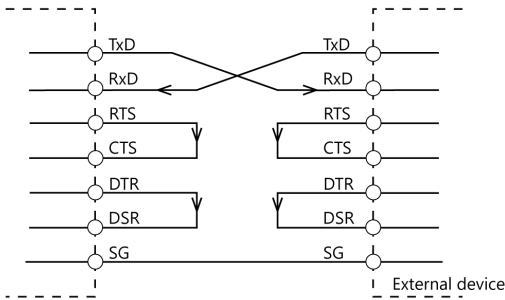

Differences by Board Number

The products are different in specifications, depending on the board number as listed below.

COM-2P(PCI)H

| Item      | Board No.                   |                   |
|-----------|-----------------------------|-------------------|
|           | No.7209, No.7209A, No.7209B | No.7209C or later |
| Baud rate | 2 - 921,600bps              | 30 - 921,600bps   |