

CONPROSYS Series
Serial Cable for FANUC CNC (20pin – 9pin)
CPS-CAB-S01-1 (1m)
CPS-CAB-S01-3 (3m)
CPS-CAB-S01-5 (5m)



* Specifications, color and design of the products are subject to change without notice.

Packing List

Product (One of the followings) ...1

[PS-CAB-S01-1, PS-CAB-S01-3, PS-CAB-S01-5]


Specification

Item	Specifications
Connector used	20-pin half pitch connector PCR-E20FS+[HONDA] or equivalent 9-pin D-SUBconnector 17JE-13090-02(D1)A [DDK] or equivalent PCR-E96F [HONDA]
Cable	10 core shield cable (5pair). Conductor size: AWG#28 Conductor composition: 7pcs/0.127mm UL20276
Weight	CPS-CAB-S01-1:100g (Max.), CPS-CAB-S01-3:200g (Max.), CPS-CAB-S01-5:300g (Max.)

Target products


CPS-MC341-ADSC1-931
CPS-MCS341-DS1-131
CPS-MG341-ADSC1-931

Physical Dimensions

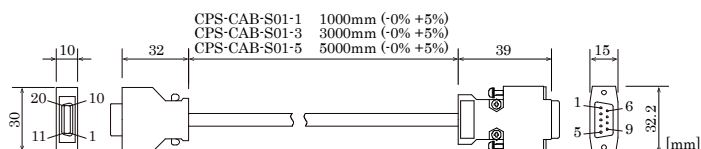

The product is cables to connect the FANUC CNC and the CONPROSYS series CNC communication support controller(s).

Connection Diagram

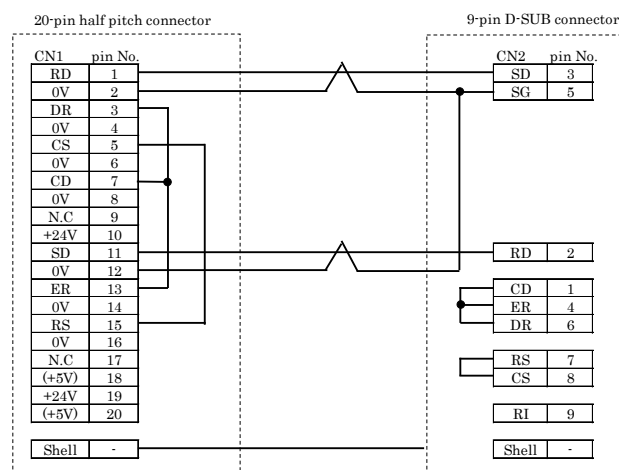

* The shell of 9-pin D-SUB connector is unconnected.